

Specifications

- Voltage rating: 200V AC, DC
- Current Rating: 2A, AC, DC
- Withstand voltage: 100V AC/minute
- Contact resistance: 20m Ω max
- Insulation resistance: 500m Ω min
- Temperature range: -40°C ~ +105°C
- Suitable JVT2301T series Terminal
Compliant with RoHS and REACH
- Contact JVT for details

JVT2301H

2.3mm Pitch housing



HOUSING

Part No. : JVT2301HN2-04X

Material: Nylon 66 UL94V-0

Mates With Part(s): JVT2301 Terminal

JVT2301HN2-04X
 Logo _____
 Series NO. _____
 Housing _____
 N2-PA66 UL94V-2
 Pin NO. _____
 P "+" On "-" Down
 0 "-" On "+" Down

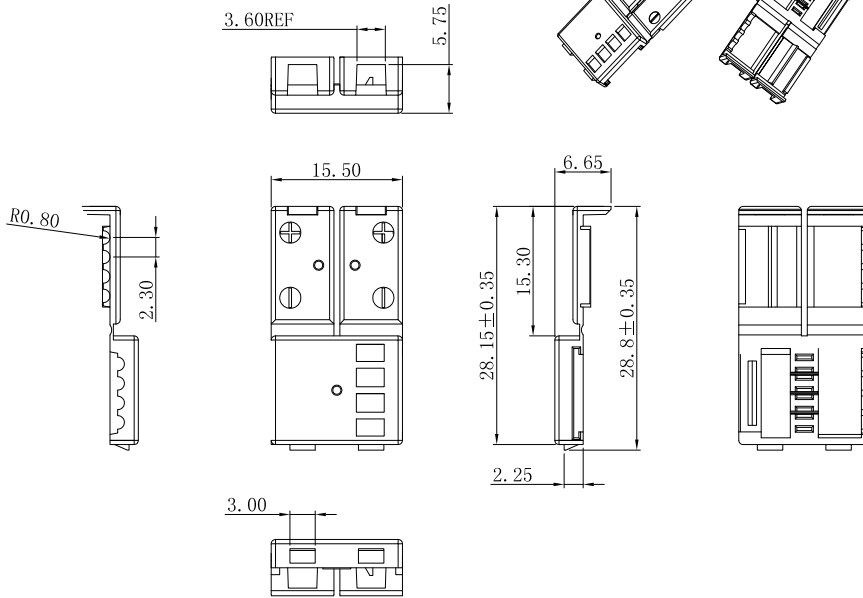

JVT2301T

2.3mm Pitch housing



HOUSING


Part No. : JVT2301HN2-04X

Material: Nylon 66 UL94V-0

Mates With Part(s): JVT2301 Terminal

JVT2301HXX-02X
 Logo _____
 Series NO. _____
 Housing _____
 N2-PA66 UL94V-2
 Pin NO. _____
 P "+" On "-" Down
 0 "-" On "+" Down

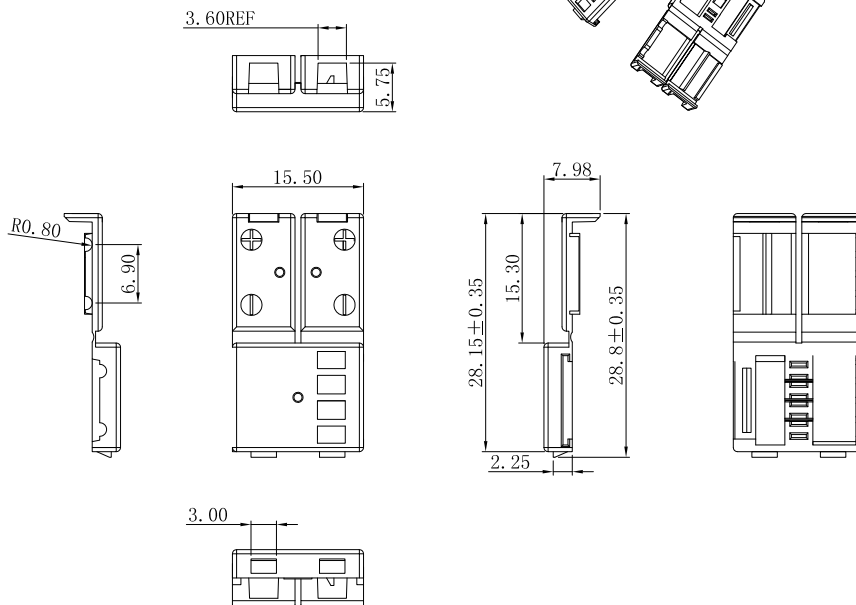

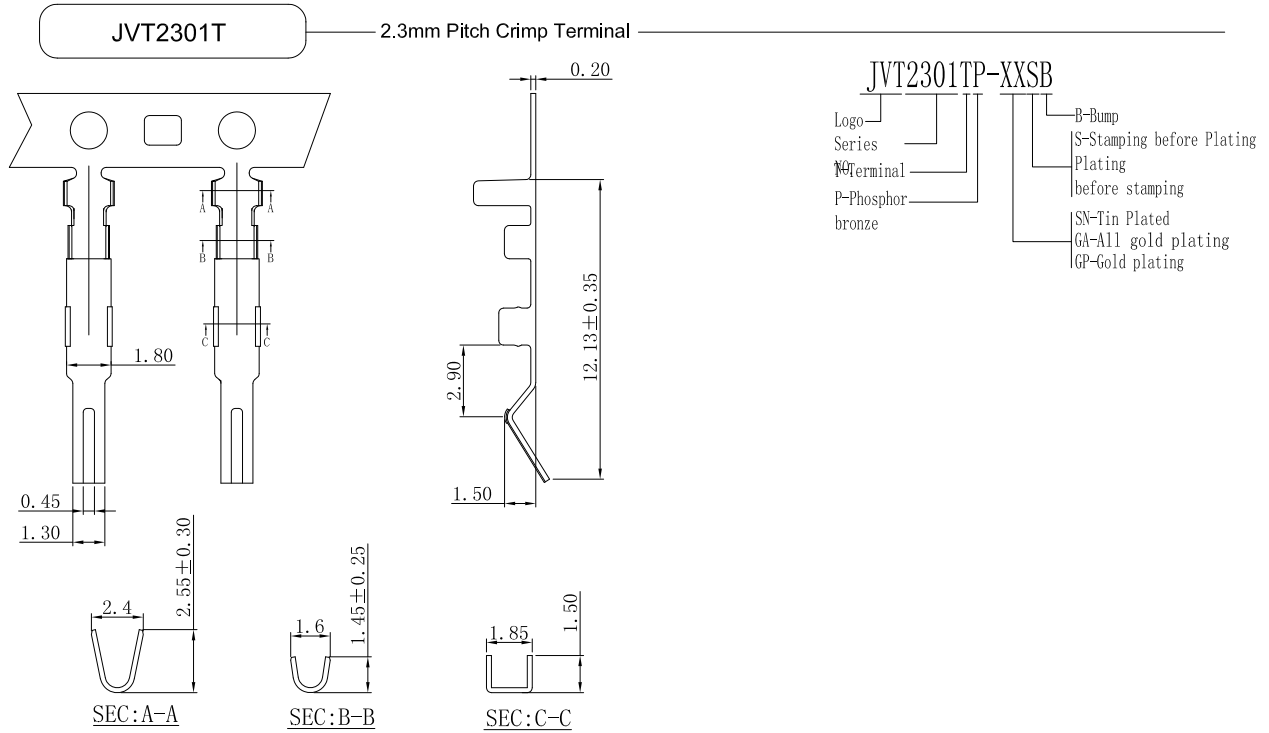

JVT2301TP-XXSB	Phos Bronze	Tin Plated	AWG#24~28	1.4mm(Max)	JVT2301 HOUSING
PART NO	Material	Finish(Pin)	Wire Range	Insulation O.D.	Mates With Part(s)